




Flo2 Manual Diverter Valve

DV-200 and DV-300

Certified for DWV UPC Listed File No. 10011

Greenergy Group, Inc.'s line of Flo2 Diverter valves (patent pending) are IAPMO code approved, UPC listed, DWV, true full-port valves suitable for all drainage and waste applications.

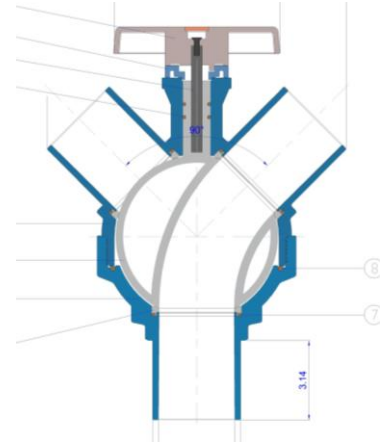

Pictured: 2" ABS front (left), 3" PVC back (middle), and 3" cross section (right).

VALVE MATERIALS

- ABS or PVC valve body
- CPVC Internal Ball
- PTFE Seals
- SS304 Shaft
- EPDM O-rings
- ABS Handle

FEATURES

- True full-port design allows for maximum flow
- Simple assembly and fewer parts for easy maintenance
- Larger sizes available upon request
- Optional 90° adapter and extension handle
- Manual or electronic/wireless electronic actuation

APPLICATIONS

- Septic Systems
- Laundry to Landscape
- Greywater Recycling
- Industrial Gravity Flows

DIMENSIONS

| Inlet/Outlet Diameter | 2" | 3" |
|-----------------------|--------|--------|
| Height: | 11.37" | 15.50" |
| Length: | 5.51" | 7.90" |
| Width: | 7.99" | 11.88" |

MARKINGS

- UPC Shield
- ABS or PVC
- Flo2 and Model Number
- Directional Decals Provided

COMPLIES WITH

- IAPMO PS 59-2016
- PVC Schedule 40 ASTM D1784
- ABS Schedule 40 ASTM D2661

