




# Flo2 Manual Diverter Valve

DV-200 and DV-300

*Certified for DWV UPC Listed File No. 10011*

Greenergy Group, Inc.'s line of Flo2 Diverter valves (patent pending) are IAPMO code approved, UPC listed, DWV, true full-port valves suitable for all drainage and waste applications.

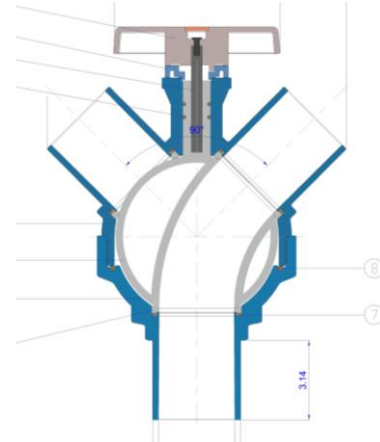

*Pictured: 2" ABS front (left), 3" PVC back (middle), and 3" cross section (right).*

## VALVE MATERIALS

- ABS or PVC valve body
- CPVC Internal Ball
- PTFE Seals
- SS304 Shaft
- EPDM O-rings
- ABS Handle

## FEATURES

- True full-port design allows for maximum flow
- Simple assembly and fewer parts for easy maintenance
- Larger sizes available upon request
- Optional 90° adapter and extension handle
- Manual or electronic/wireless electronic actuation

## APPLICATIONS

- Septic Systems
- Laundry to Landscape
- Greywater Recycling
- Industrial Gravity Flows

## DIMENSIONS

Inlet/Outlet Diameter	2"	3"
Height:	11.37"	15.50"
Length:	5.51"	7.90"
Width:	7.99"	11.88"

1"-6" available upon request

## MARKINGS

- UPC Shield
- ABS or PVC
- Flo2 and Model Number
- Directional Decals Provided

## COMPLIES WITH

- IAPMO PS 59-2016
- PVC Schedule 40 ASTM D1784
- ABS Schedule 40 ASTM D2661

For more information, please visit us at [www.flo2valves.com](http://www.flo2valves.com) or contact us at:  
 742 Arnold Dr. Ste C Martinez, CA 94553 | P: 800-604-6848 | F: 925-322-2034 | [info@thegreenergygroup.com](mailto:info@thegreenergygroup.com)

